


Balancing Machine for Railway Carriage Wheels

BVW-F

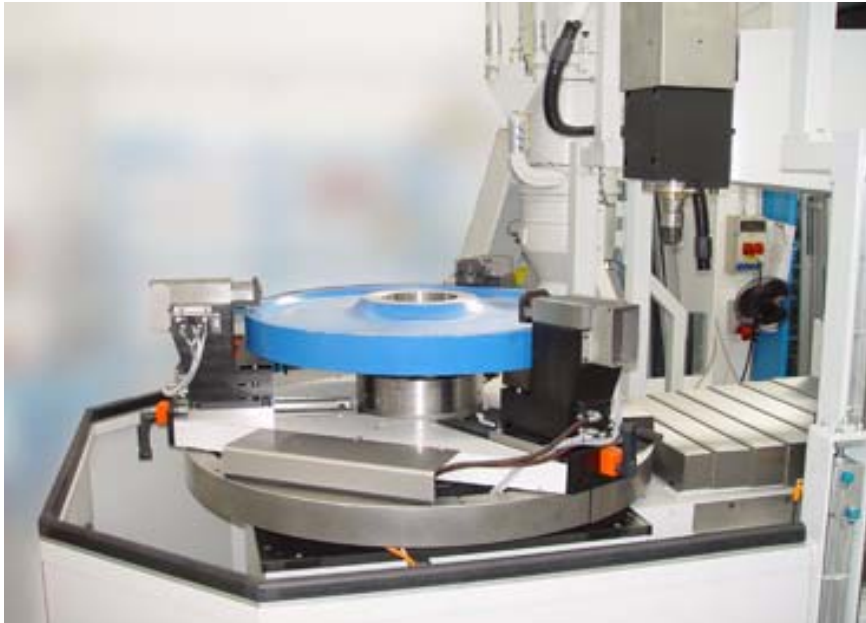

Advantages

- Compact design for minimum floor space requirement
- Manually or automated loading.
- Fully automatic balancing with unbalance correction by milling.
- Permanent calibration.
- Sliding protection opening downwards on 3 sides for optimum loading of workpiece.
- Conforms to UIC 812-3 and EN 13262 technical specification for the supply of solid wheels for traction vehicles and trolleys.
- Simple conversion using workpiece specific adaptor parts.

Applications

- Balancing of disc-shaped rotors with large mass and diameter.
- Application in series or single-piece production of:
 - Railway carriage wheels,
 - Wheel brake discs,
 - Friction rings.
- Manual loading and unloading by the operator using a crane with lifting gear or automated with gantry loader.
- Unbalance correction by segment milling on the workpiece circumference with formed cutter.

Description

- The workpieces are clamped on the measuring spindle with zero-backlash using a wedge bar chuck for measuring.
- For mass correction the work piece is clamped at the outer diameter by three centring clamps with downholder function.
- The mass-correction is performed per customer specification by segment milling or in accordance with UIC 812-3 and EN 13262 using a formed cutter.
- The resulting swarf is extracted using an exhaust hood and a suction unit.




Front view



Side view

All information without obligation,
subject to change without notice

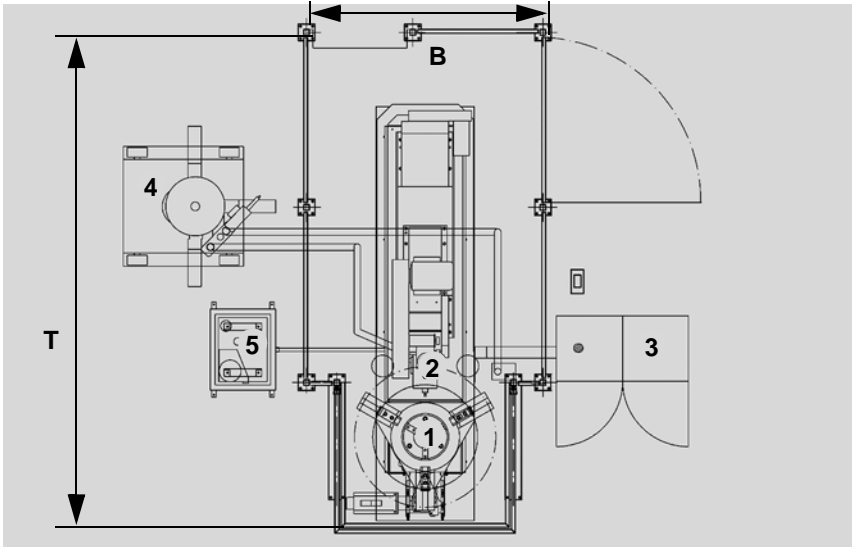

1 Unbalance measuring, 2 Milling unit, 3 Control cabinet, 4 Swarf extractor, 5 Hydraulics

Clamping block with attachment bracket

Technical data

		BVW32-FM1	BVW13-FM1
Rotor			
Weight, max.	kg	200	1000
Outer diameter, min.	mm	610	710
Outer diameter, max.	mm	1100	1290
Machine			
Width x depth x height	mm	1550 x 4880 x 3200	2300 x 4670 x 3400
Loading height, approx.	mm	1300	1250
Balancing speed, approx.	rpm	360	250
Measuring uncertainty ¹⁾	gm	< 0.2	< 0.4
Machining cycles, approx.	min	3 - 4	3 - 4

¹⁾ Measured with the master rotor, w/o clamping, releasing

Options

- Cut detection with tool monitoring system
- Gantry loader
- Marker unit (microdot marker)
- Test rotor with calibration weight
- Report printer
- Additional software for statistics and production checking

Scope of supply

- Rigid machine housing
- Measuring unit with 3-jaw clamping chuck
- NC rotary table with axial clamping chuck
- Milling unit with NC feed
- Swarf extraction unit with exhaust hood
- Protection device class B per ISO 7475 with vertical closing loading door
- Control cabinet with automatic control and measuring unit